
CONDUIT ID RANGE	APPLICABLE 6" [150mm] CONDUIT	PORT RANGE
5.95" - 6.15"	PVC SCH 40	1.68" - 1.72"
[151.13mm - 156.21mm]	HDPE SCH 40 F2160	[42.67mm - 43.68mm]


Applicable conduit types based on product's conduit ID range meeting or exceeding conduit ID dimensions specified in one or more of following standards: UL651, UL651A, ASTM F2160, NEMA TC 6 & 8

> $\emptyset$  6.311in 160.31mm


> > 5.948in

[151.09mm]





SCALE 1:3

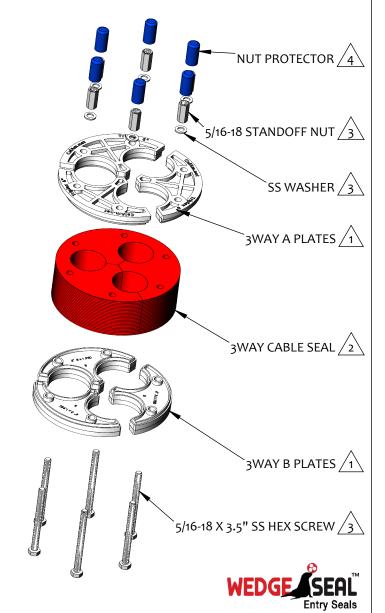



12.62mm

Material: PVC Material: TPE

Material: Stainless Steel

Material: Vinyl

## TRIPLEX ENTRY SEAL, 6.00" | 150mm, PORT 1.70" | 43mm TITLE

## PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CAL AM MANUFACTURING. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CAL AM MANUFACTURING IS PROHIBITED.

SCALE:	1:3	PRODUCT 7360-170	
REVISION	В	TOLERANCES: X±0.1 X.X±0.05 X.XX±0.030 X.XXX±0.020	
DRAWING NO.	7360-170	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES	
DRAWN	JC. MORENO	DATE: 12/09/2024	



SHEET 1 OF 1

TPE-DW-ING-001 Rev.A