
CONDUIT ID RANGE	APPLICABLE 6" [150mm] CONDUIT	PORT RANGE
5.95" - 6.15"	PVC SCH 40	1.83" - 1.87"
[151.13mm - 156.21mm]	HDPE SCH 40 F2160	[46.48mm - 47.49mm]


Applicable conduit types based on product's conduit ID range meeting or exceeding conduit ID dimensions specified in one or more of following standards: UL651, UL651A, ASTM F2160, NEMA TC 6 & 8


Ø6.311in 160.31mm

5.948in

[151.09mm]





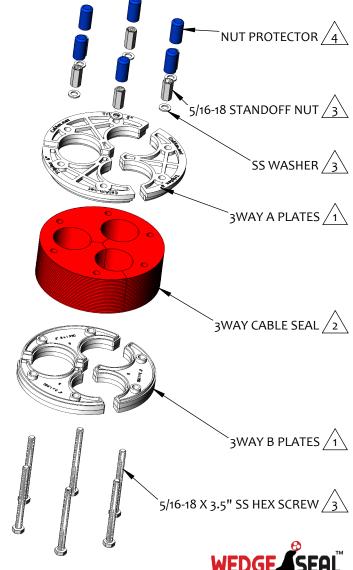

WE

NOTES:

12.62mm

Material: PVC

Material: Stainless Steel

Material: Vinyl

## TITLE TRIPLEX ENTRY SEAL, 6.00" | 150mm, PORT 1.85" | 47mm

## PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CAL AM MANUFACTURING. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CAL AM MANUFACTURING IS PROHIBITED.

	SCALE:	1:3	PRODUCT 7360-185	
	REVISION	В	TOLERANCES: X±0.1 X.X±0.05 X.XX±0.030 X.XXX±0.020	
	DRAWING NO.	7360-185	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES	
	DRAWN	JC. MORENO	DATE: 12/09/2024	



www.CalAm.net

SHEET 1 OF 1

TPE-DW-ING-001 Rev.A