
CONDUIT ID RANGE	APPLICABLE 6" [150mm] CONDUIT	PORT RANGE
5.95" - 6.15"	PVC SCH 40	1.03" - 1.07"
[151.13mm - 156.21mm]	HDPE SCH 40 F2160	[26.16mm - 27.17mm]


Applicable conduit types based on product's conduit ID range meeting or exceeding conduit ID dimensions specified in one or more of following standards: UL651, UL651A, ASTM F2160, NEMA TC 6 & 8


> 6.427in 163.24mm

> > 6.067in

154.10mm





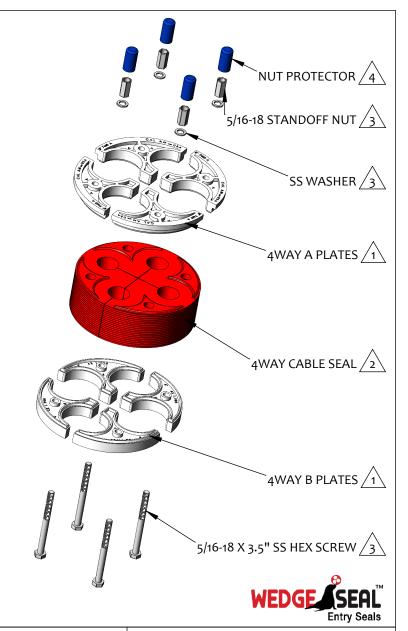



_110.87mm 4.365in

> Material: PVC Material: TPE

Material: Stainless Steel

Material: Vinyl

QUADPLEX ENTRY SEAL, 6.00" | 150mm, PORT 1.05" | 27mm TITLE

SCALE 1:3

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CAL AM MANUFACTURING. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CAL AM MANUFACTURING IS PROHIBITED.

DRAWN	JC. MORENO	DATE : 11/15/2024	
DRAWING NO.	7460-105	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES: X±0.1	
REVISION	В		
SCALE:	1:3	PRODUCT 7460-105	



SHEET 1 OF 1

TPE-DW-ING-001 Rev.A