


PART NO.	NOM CABLE OD	RANGE
7350-180	1.80	1.78 - 1.82
7350-175	1.75	1.73 - 1.77
7350-170	1.70	1.68 - 1.72
7350-165	1.65	1.63 - 1.67
7350-160	1.60	1.58 - 1.62
7350-155	1.55	1.53 - 1.57
7350-150	1.50	1.48 - 1.52
7350-145	1.45	1.43 - 1.47
7350-140	1.40	1.38 - 1.42
7350-135	1.35	1.33 - 1.37
7350-130	1.30	1.28 - 1.32
7350-125	1.25	1.23 - 1.27
7350-120	1.20	1.18 - 1.22
7350-115	1.15	1.13 - 1.17
7350-110	1.10	1.08 - 1.12
7350-105	1.05	1.03 - 1.07
7350-100	1.00	0.98 - 1.02
7350-095	0.95	0.93 - 0.97
7350-090	0.90	0.88 - 0.92
7350-085	0.85	0.83 - 0.87
7350-080	0.80	0.78 - 0.82
7350-075	0.75	0.73 - 0.77

Rev.	Change	Date
B	Seal from black to red. Same properties	3/01/16

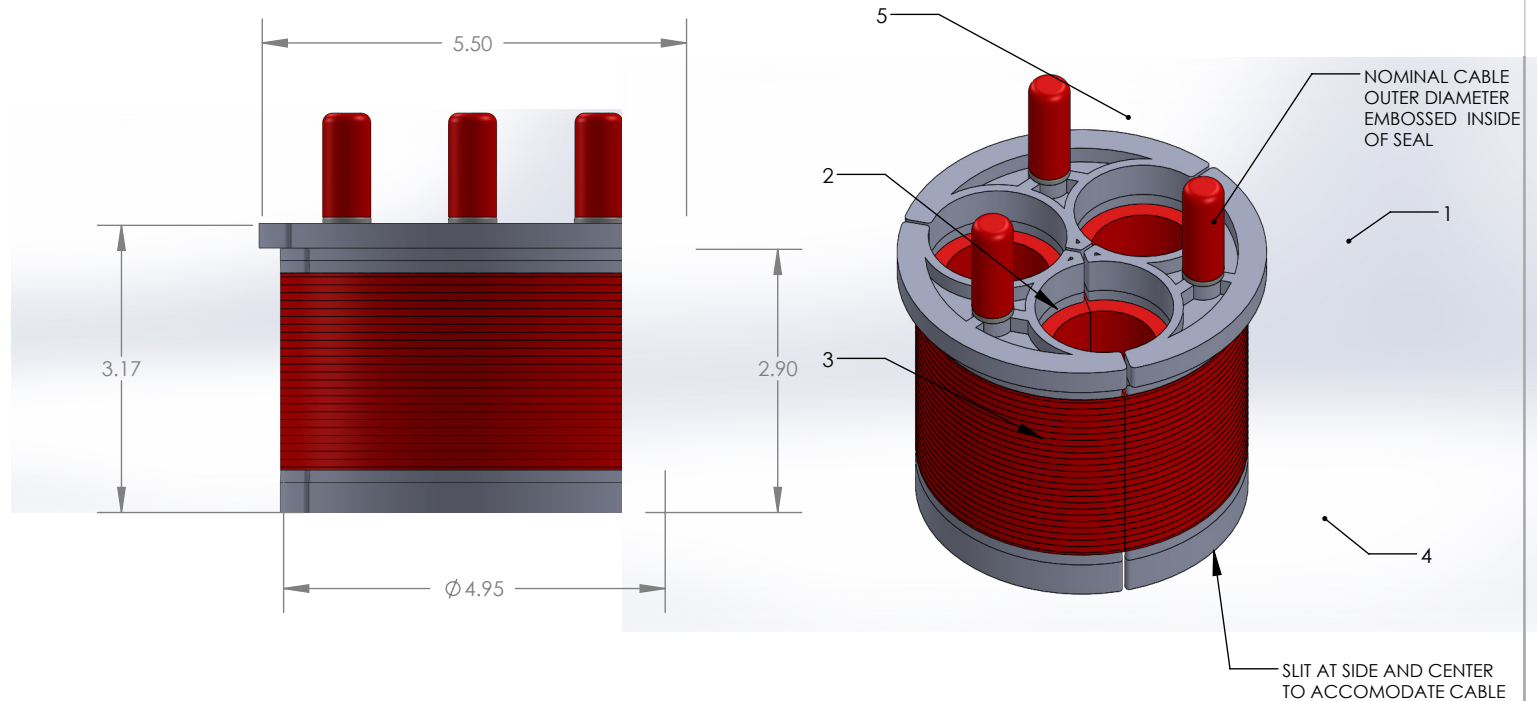

- 1: Top compression plate - PVC
- 2: Stainless steel washer bolt and coupling
- 3: Thermoplastic elastomer seal. Red
- 4: Bottom compression plate - PVC
- 5: Bolt & coupling protector PVC

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
CAL AM MFG. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
CAL AM MFG. IS
PROHIBITED.

UNLESS OTHERWISE SPECIFIED:		NAME	DATE
DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL ±.5 TWO PLACE DECIMAL ±.010 THREE PLACE DECIMAL ±.005 FOUR PLACE DECIMAL ±.0005	DRAWN	E.GARCIA	06/02/14
	CHECKED	F.GRO	06/02/14
	MFG APPR.	B.ARNOLD	06/02/14
	ANN.	INCHES	
INTERPRET GEOMETRIC TOLERANCING PER: INCHES	COMMENTS:		
DO NOT SCALE DRAWING			



TITLE: WEDGE SEAL 3-WAY
5" DUCT SCH. 40.
UNDERGROUND FIBER
OPTIC/ELECTRIC SEAL

SIZE	DWG. NO.	REV
A	1735XXX	B
		SHEET 1 OF 1